

LITZ CHD 35% - 50% - 75%

Polyurethane film for headlight protection.


Provides protection and tinting for headlights against chips and scratches. Suitable for both exterior and interior use.

:Litz

Created by
INSTALLERS, FOR INSTALLERS

Film structure

	Total film thickness	160 Micron
1	Transport liner	50.8 Micron
2	Top polyurethane layer	25 Micron
3	Base polyurethane layer	110 Micron
4	Adhesive layer	25 Micron
5	Liner	75 Micron

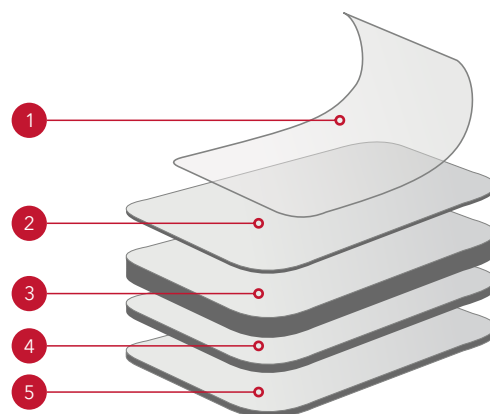

INSPECTION ITEMS	TEST METHOD	STANDARD	VALUE
Color	Visual inspection		Tinted Gray
Film surface type	Visual inspection	Glossy	Glossy
Self-healing	Copper brush 10 times, 1 min in hot water (50-70°C)	100%	100%
Film peel resistance (after 20 minutes)	GB/T 2792	>2,32 H/cm	6,6 H/cm
Film peel resistance (after 24 hours)	GB/T 2792	>2,32 H/cm	9,8 H/cm
Stretchability at break of the top layer	GB/T 1040.1	>80%	120%
Stretchability at break of the film	GB/T 1040.1	>250%	400%
Tear resistance (whole film)	GB/T 1040.1	>40 KH/M	50 KH/M
Force for double elongation	GB/T 1040.1	>6 Mpa	19 Mpa
Operating temperature range			-30C ~ +50C
Warranty (delamination, yellowing, hazing)			5 years

All statements, technical information, and recommendations contained in this document are based on tests that :Litz considers reliable. However, :Litz does not guarantee the accuracy or completeness of this information.